
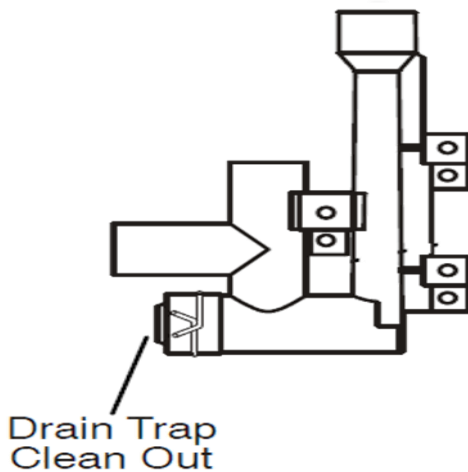


Condensate Trap

The condensate trap that is provided with our 90% plus furnaces must be used to insure proper condensate removal. The condensate trap is designed to withstand .5 inches WC to ensure the trap retains its prime. It is recommended that the air condition condensate line and the furnace condensate line be run separate to ensure that static pressure from the duct system does not pressurize the furnace condensate line through the air condition drain line. The trap is sized so that standard 3/4 inch PVC pipe can be used in installations. A clean out is provided on the trap and needs to be cleaned and checked at the beginning of each heating season to ensure proper condensate removal.

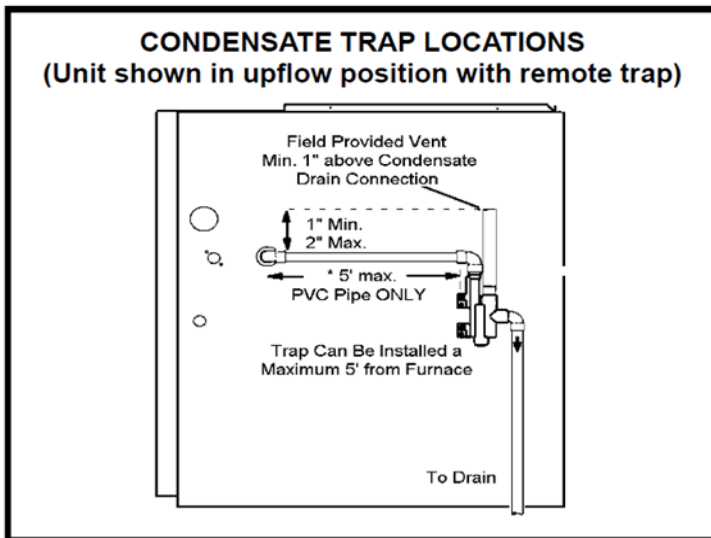

FOR DEALER DISTRIBUTION

Product Information Bulletin